


BUSTER BULB

ACTION: E26 SCREW

RANGE: LIGHTING

The World's first designer LED bulb. Available in Crystal, Gold or Smoked finish. The resin light pipe at the centre of the bulb is where all the magic happens, allowing the bulb to create a subtle ambient light whilst at the same time throw focused spot light onto tables & surfaces below. The bulb fits in any E26 screw light fitting, but looks especially great when teamed up with our Heavy Metal or Hooked lighting ranges.



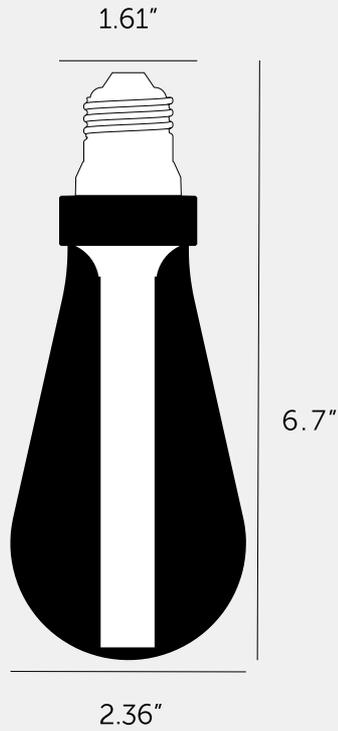

SPECIFICATIONS

Buster Bulb 5W Dimmable
 Supply: 120 V AC
 Frequency: 60 Hz
 Current: 60 mA
 Power Factor: 0.9
 Expected Lifetime*: 40,000 hrs
 Weight: 110 g
 Luminous Flux: Crystal max 320lm, Gold max 260lm, Smoked max 150lm
 CCT: Crystal 2700K, Gold 2500K, Smoked 2600K
 CRI: 80
 ETL Certified*

Buster Bulb 2W Non-dimmable
 Supply: 100-240 V AC
 Frequency: 50/60 Hz
 Current: 40 mA
 Power Factor: 0.5
 Expected Lifetime*: 35,000 hrs
 Weight: 110 g
 Luminous Flux: Crystal 125lm, Gold 75lm, Smoked 100lm
 CCT: Crystal 2700K, Gold 2500K, Smoked 2600K
 CRI:80
 ETL Certified*

FINISH & SKU NUMBERS

sku:	finish:	size:
BB-TD-E26-D-CR-B	● crystal	E26 5W
BB-TD-E26-ND-CR-B	● crystal	E26 2W
BB-TD-E26-D-GO-B	● gold	E26 5W
BB-TD-E26-ND-GO-B	● gold	E26 2W
BB-TD-E26-D-SM-B	● smoked	E26 5W
BB-TD-E26-ND-SM-B	● smoked	E26 2W

CARE INSTRUCTIONS

Wipe with dry cloth with no loose hairs, avoid using any chemicals. Please note all finishes are prone to aging.

INCLUDED

1 x E26 Buster Bulb

PLEASE NOTE

Buster Bulb 5W Dimmable
 The dimmable LED BUSTER BULB requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/off switches.
 If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains dimmable via phase cut/trailing edge dimming. To avoid disappointment, please ensure a compatible smart module is fitted before purchase.

Buster Bulb 2W Non-dimmable
 The non-dimmable LED BUSTER BULB is only compatible with on/off switches. If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains operated at 120VAC. To avoid disappointment, please ensure a compatible smart module is fitted before purchase.

ETL marked.
 Official data document can be supplied upon request.
 For indoor use only.
 *This product is specifically designed and developed for domestic use in normal conditions and operation only. The lifetime mentioned on the packaging is an average only. This product comes with 2 years warranty.